



BY ESTELLES LIGHTING




IMPAL6

**Product Specifications**

- Housing:** Die-cast aluminum base, corrosion-resistant polyester powder coat finished
- Lens:** The optic chamber is surrounded and sealed with silicon gasket ensuring good performance
- Mounting:** Post Top Mounting
- Electrical:** AC 90-277v
- Wattage:** 70W/100W
- Finish:** BRONZE
- Certification:** cETLus, IP66, CE
- System Light Efficiency:** > 100 lm/W AC90-277V
- IP Grade:** IP65
- Color Temperature:** 4000K、 5000K、 6000K
- Applicable places:** Squares,avenues,pedestrian street, parking lots etc.

**Dimensional Drawings:**

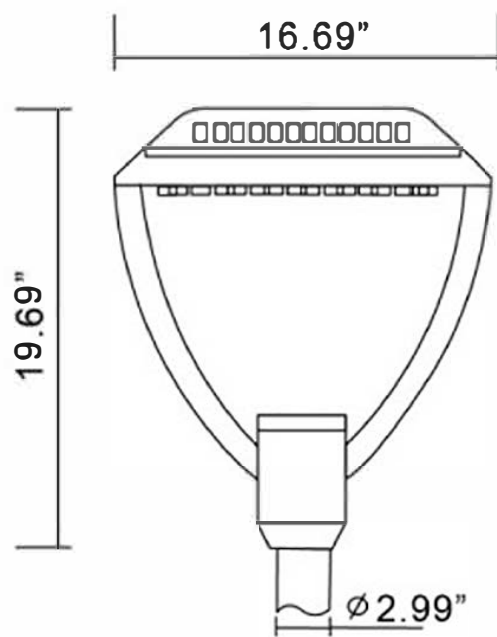

**Ordering information**

Example:IMPAL6-20-LED-1-U-40-B

Series	Source	Wattage	Voltage	CCT	Finish	Options
IMPAL6	LED=LED	1=70W 2=100W	U=AC90-277V	40=4000K 50=5000K 60=6000K	B= (Bronze)	
<b>Size</b>						
20=17x20 in						

\*Consult Factory regarding availability.

