

BY ESTELLES LIGHTING



IMPAL7


PRODUCT DESCRIPTION:

Aluminum housing, optimized heat release, with electric-static polyester powder coat finish; corrosion and shock resistant
Secondary optics design provides specific light curve and high lumen efficiency.
Suitable for garden, plaza, pedestrain street, residential area,etc

FEATURES:

- Replace up to 70W pulse start Metal Halide lamp.
- CCT ≤5700K;
- CRI(CRA): > 70
- Universal 90-277V, 50/60Hz driver (347-480V optional)
- Lens angles: T120
- Without any hazardous material in fixture.
- LM79,LM80 available
- 5 years warranty.

Dimensional Drawings:

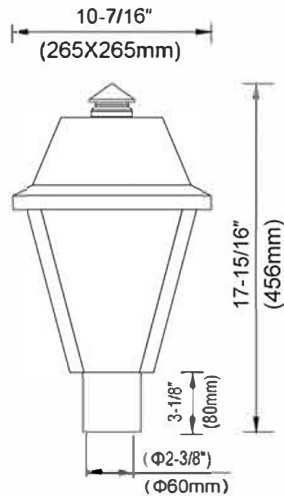

IMPAL7-B



TYPE	WATTAGE (NOMINAL)	CCT	DISTRIBUTION	FINISH	VOLTAGE	CONTROLS
IMPAL7	LED = HID 25W = 50W MH 35W = 70W MH	C30=3000K C40=4000K C50=5000K	T120=120°	LB=Light Black (RAL7016) DB=Dark Black (RAL9005) CC=Custom	(OMIT)= 90-277V UH=347-480V	(OMIT)= None PC = Photocell MD =Motion/Daylight Sensor

*Consult Factory regarding availability.

