

SHADOW SERIES LED BOLLARD

IL-BL01-024

PROJECT:
TYPE:



DESCRIPTION

The Shadow series round bollard features a simple and sleek design. It offers symmetric and asymmetric distributions 35" heights. House side shield is available. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

FEATURES

- Simple and sleek design
- Symmetric and asymmetric distributions
- House side shield available
- 35" high
- IP65 rated for wet location

ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Minimum Ambient -22°F, maximum ambient 122°F
- Power Factor: > 0.9 @120Vac
- Total Harmonic Distortion: < 20%

FEATURES:

- Product Specification 24W aluminum Bollard Light
- Model IL-BL01-024
- CCT 3000K,4000K,5000K 35.43"
- Dimensions Hx6.5"D
- CRI ≥ 70
- Finishes Black
- Dimming 1-10V Dimming Standard
- Power 14W,24W
- Input Voltage 100-277VAC
- Suitable Outdoor
- Lumen Output 2880lm
- Power Factor >0.9
- Certification ETL
- Working Temperature -30°C to + 50°C(-22 °F to 122°F)
- Warranty 3 years Limited warranty


SPECIFICATION

35" HIGH

Max Weight:15.4lbs

EPA: 1.92ft²

Dimension: 35.43" Hx6.5"D

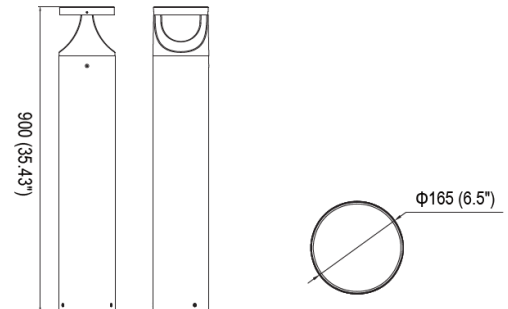

Last update: 2022

Due to continuous improvements, the information herein may be changed without notice

SHADOW SERIES LED BOLLARD

IL-BL01-024

PROJECT:
TYPE:




ACCESSORIES (ORDER SEPARATELY)



CODE: IL-BC-B01-01

ROUND HOUSE SIDE SHIELD OPTIONAL
TO REDUCE GLARE LIGHT



CODE: IL-ABMK03

IL-ABMK03 VBD-HSS-BK
ANCHOR BOLTS MOUNTING KITS

Ordering Example: IL-BL01-024-4000K-Black-120°-House Side Shield

Series	Wattage	Color Temp.	CRI	Beam	Finish	Optional
IL-BL01-024	1 - 14W 2 - 24W	1 - 3000K 2 - 4000K 3 - 5000K	1 - ≥ 70	1 - 120°	1 - Black	1 - IL-BC-B01-01 2 - IL-ABMK03

Last update: 2022

Due to continuous improvements, the information herein may be changed without notice



Impulse Lighting Inc.
www.impulselightingusa.com
12603 Farm to Market Rd 529,
Houston, TX 77041
Phone: 281-853-9100