


IL-LR6836T


Trim Version

Continuous Clean Lines and Clean Light

Architectural Linear LED Fixture

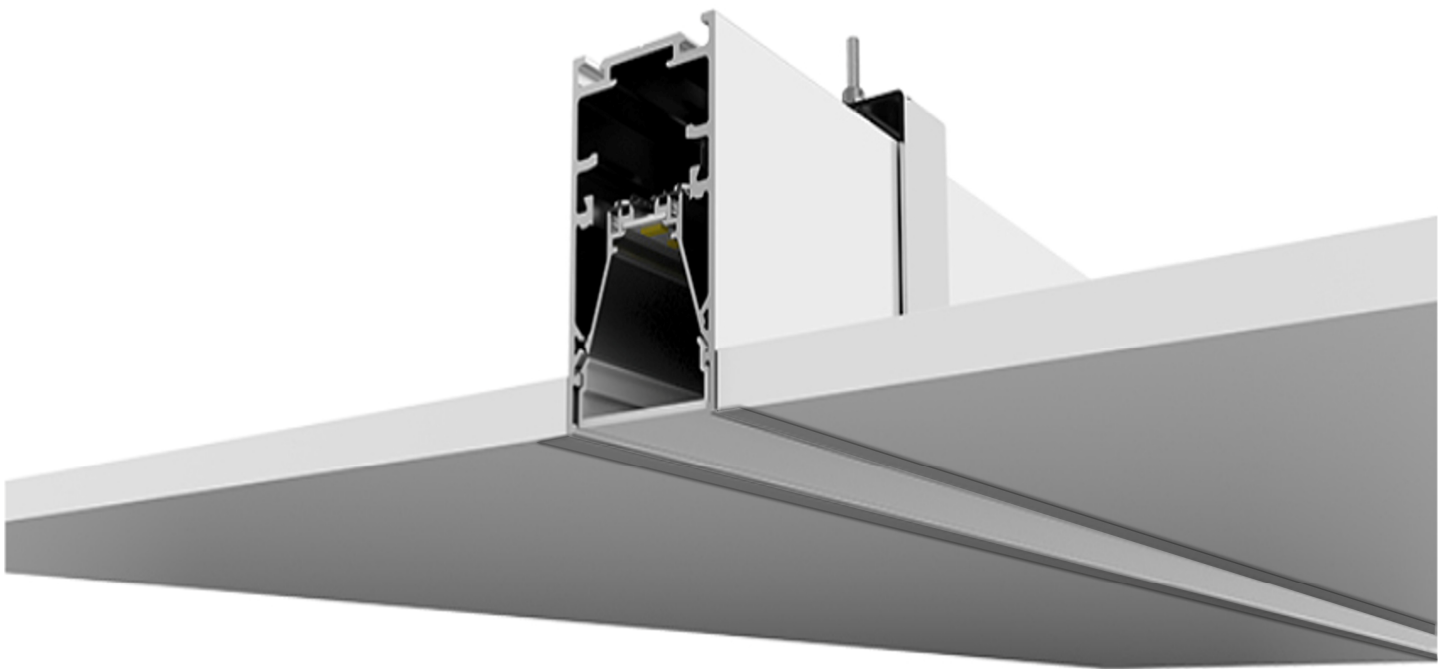

Unlimited Design Possibilities

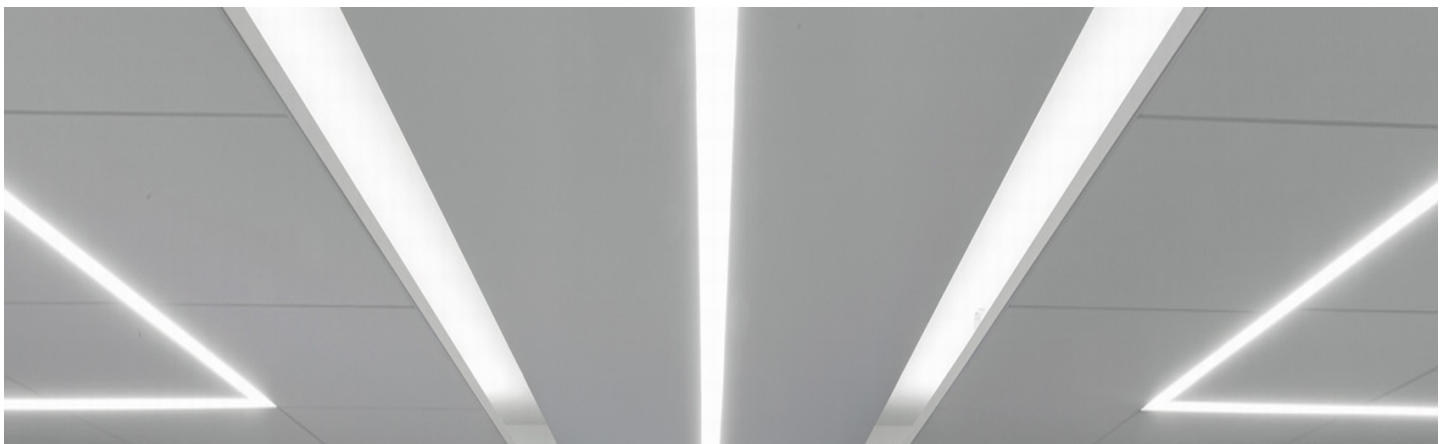

IL-LR6836T

DETAILS

The linear light *Liscio* series has been launched by IMPULSE LIGHTING to achieve different shape designs with easy and quick connection. Those products have re-defined user experience of linear light through modularity design and quick assembly & installation.

It breaks the idea which restricted traditional lighting fixtures and created complicated wiring of old version linear light fixtures. It has achieved "three quicks": quick assembly, quick connection (eliminates complicated wiring) and quick corner connection.





DESCRIPTION :

The *Liscio* linear light quick connection series is based on concise style and user experience improvement.

Various concise yet fashionable designs can be accomplished quickly through the creative ideas of space lighting designs and free design styles while emphasizing "QUICK" installation. *Liscio* permits the designer to create much better lighting effects than traditional lighting fixtures by revealing the beauty of linear light.

FEATURES :

- *Low glare version available upon request UGR<19 rated.*
- *End caps assembled by mechanical screws and magnet structure.*
- *Lighting CCT/color and CRI could be customized.*
- *Internal 3-in-1 dimming function.*
- *Conform to ETL standard.*
- *Easy assembly/disassembly, customers do not need to do complicated wiring, use male/female connectors to connect electric power and to do free connection to get comfortable user experience.*


Product	IL-LR6836T
Cover	Plain diffusion mask, UGR<19 (Low glare)
Length	1200mm (4ft), 2500mm (8ft)
Installation	Recessed mounted
Profile Color	Silver/White/Black
CCT (K)	3000K, 3500K, 4000K, 5000K, 6000K±300
Lumen (lm)	3100 lm (4ft), 6200 lm (8ft)
Beam Angle (°)	90° (Plain diffusion mask), 65° (UGR<19 (Low glare))
CRI (Ra)	≥80
Lumen/watt (lm/w)	105±10%
Power Factor	>0.9
Imax (cd)	1300 (4ft), 1900 (8ft)
Voltage (V)	AC100-277V 50/60Hz
Input Current (A)	0.13~0.35, 0.27~0.74
Watt (w)	35W (4ft), 74W (8ft)
Using Ambient Temp	Tamin=-20°C,Tamax=45°C

MOUNTING OPTIONS :




RECESSED

DIMENSIONS :

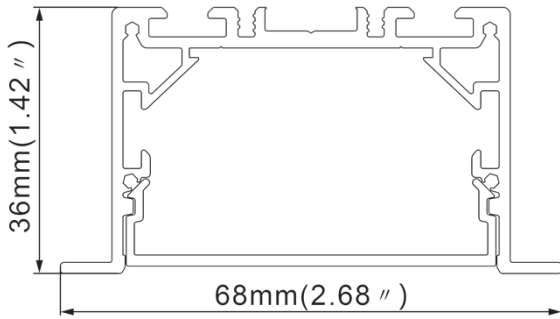


COLOR OPTIONS :

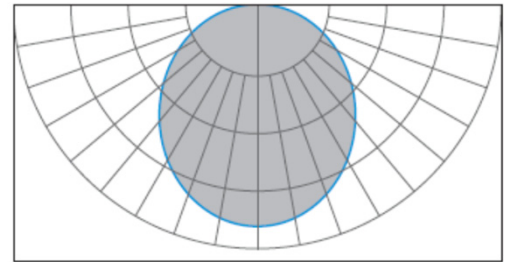


90°



DIFFUSERS & END CAPS

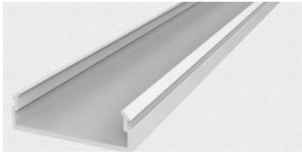

PC cover W20T-CV



UGR cover W20T-UGR




End cap DE-T2

RECESSED ACCESSORIES



Recessed clip
R-BI-T2

CORNERS & CONNECTORS



Straight connector
R-180




Corner connector
90L-T2




Corner connector
90W-T2



Corner connector
90N-T2



T shape connector
90T-T2



X shape connector
90X-T2

Ordering information:

IL-LR6836T-1-1-1-1-0-1-(1, 4, 5)-1

Series	Mounting	Wattage (Length)	CCT (K)	Voltage	Battery & Emergency Back-Up	Cover	Accessories	Finish
IL-LR6836T	1 = Recessed	1 = 35W (4ft) 2 = 74W (8ft) 3 = Custom	1 = 3000K 2 = 3500K 3 = 4000K 4 = 5000K 5 = 6000K	1 = 120V 2 = 277V	0 = None 1 = 60 Mins 2 = 90 Mins	1 = Plain diffusion 2 = UGR<19	1 = DE-T2 2 = R-BI-T2 3 = R-180 4 = 90L-T2 5 = 90W-T2 6 = 90N-T2 7 = 90T-T2 8 = 90X-T2	1 = Silver 2 = White 3 = Black