


L15A SHARP LINEAR

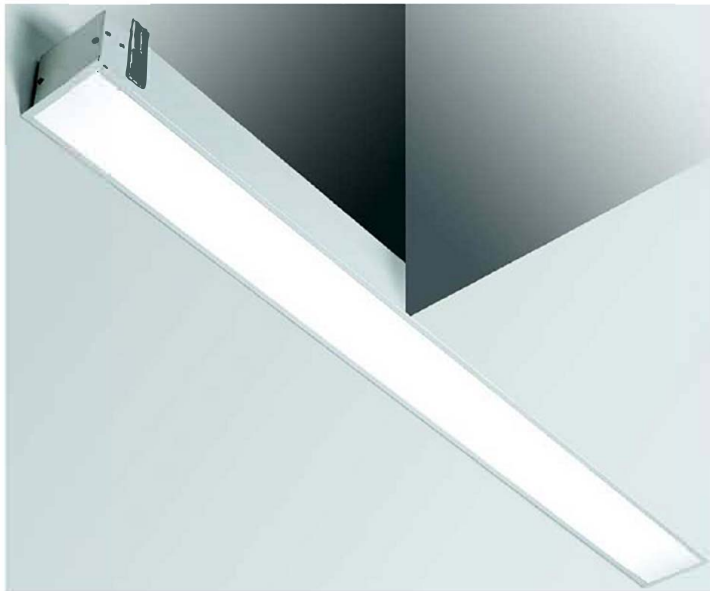

Features

simple design
Extruded aluminum trim with formed cold rolled



Finishing

Anodizing, silver gray,
white, black
Consult factory for additional custom colors

Applications

Commercial / Retail / Hotel / Office

Connections

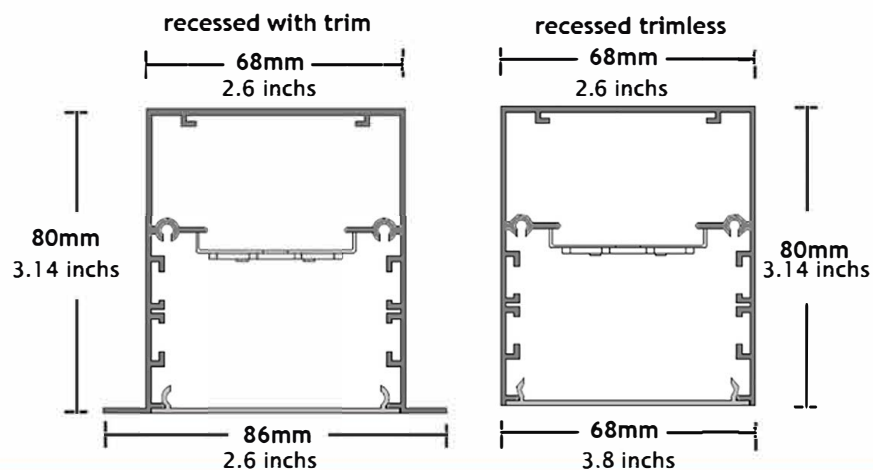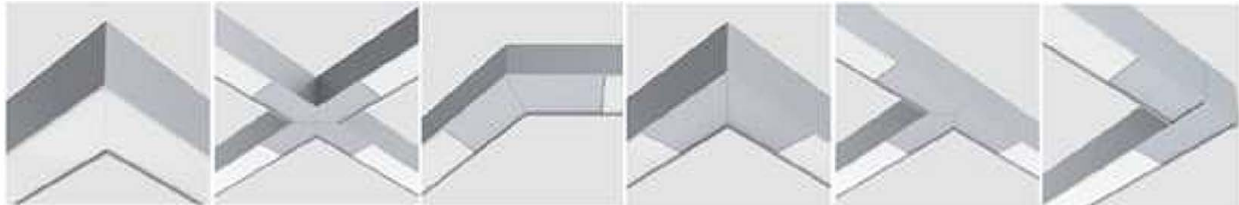

Specs for LED:

(CRI: 80 above, optional color temperatures: 3000k/4000k/5000k/6000k)


Size (mm)	system wattage (w)	system lumen output (lm)
612*(68/86)*80	11.60w	805lm @ constant driving current 350mA
912*(68/86)*80	17.40w	1225lm @ constant driving current 350mA
1212*(68/86)*80	23.20w	1624lm @ constant driving current 350mA
1512*(68/86)*80	29.00w	2030lm @ constant driving current 350mA

Accessories

End caps (aluminum die-casting),
 mounting kits, blank parts,
 straight connector, L, T & + shape connectors

Cutout sizes @ the ceiling

Recessed with trim		Recessed TRIMLESS	
Fitting sizes(mm)	cutout hole size(mm)	Fitting sizes (mm)	cutout hole size (mm)
612*(68/86)*80	605*70	600*68*80	600*68
912*(68/86)*80	905*70	900*68*80	900*68
1212*(68/86)*80	1205*70	1200*68*80	1200*68
1512*(68/86)*80	1505*70	1500*68*80	1500*68

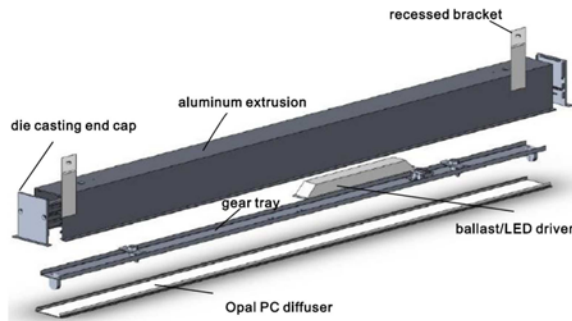

HOUSING	COLOR	LENGTH	MOUNTING ¹	VOLTAGE	FINISH	OPTIONS
L15A		Individual Units² 2- 2', 23" 3- 3', 35" 4- 4', 47" 6- 6', 71" 8- 8', 95" Continuous Runs³ xx' - Specify row length		120- 120 V 277- 277 V UNV- UNV (120-277)	WH- Matte White SL - Metallic Silver BK - Textured Black GP - Graphite BZ - Bronze CC - Custom Color	SC - SINGLE CIRCUIT EME - EMERGENCY BACKUP WET - WET LOCATION (OUTDOOR APPLICATION)
27- 27K, 249 lumens/ft (6.0 watts/ft) 30- 30K, 303 lumens/ft (6.0 watts/ft) 35- 35K, 316 lumens/ft (6.0 watts/ft) 40- 40K, 324 lumens/ft (6.0 watts/ft)			Acoustical Grid Ceiling G1G- 1" (25.4mm) Ceiling Grid G9G- 9/16" (14.3mm) Ceiling Grid Inaccessible Ceiling FL - Standard 1/2" (12.7mm) Flange NF - Flangeless ⁴			