




## WARRANTY & LISTINGS

- cETLus listed for damp locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

## FEATURES

- Available in 3000k and 4000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 50,000 hours of operation.\*\*
- Provides 600 nominal lumens.
- 6.5 nominal watts.
- Color rendering index (Ra) > 80.
- 120 AC voltage (50-60Hz) is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or retrofit applications. Equipped with torsion springs.
- Rated for insulated, non-insulated, and air-tight applications.
- Type IC. Access above ceiling required.
- Compatible with 3.75" ceiling cut-outs.
- This device is not intended for use with emergency exits.

## DIMENSIONS

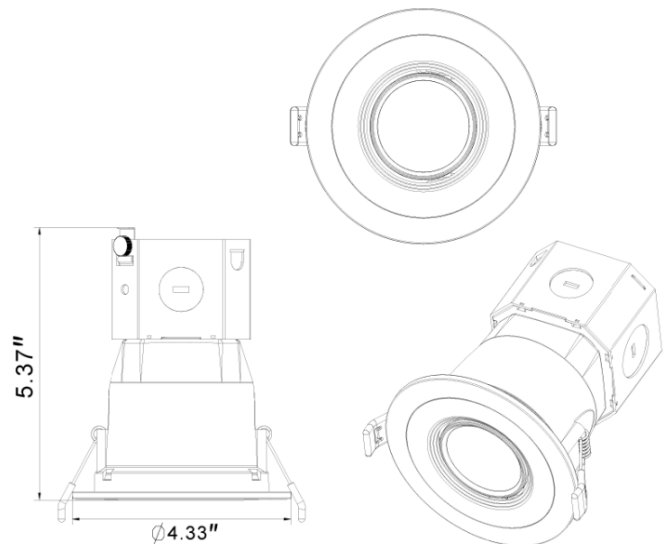

## ORDERING INFORMATION

| Model           | Trim Type   | Watts | Color Temperature<br>(lumen output) |
|-----------------|-------------|-------|-------------------------------------|
| IL- BRK-LED2ICN | GR - Gimbal | 6.5W  | 3-ECO 3000K (975 lm)                |
|                 |             |       | 4-ECO 4000K (1,050 lm)              |
|                 |             |       |                                     |
|                 |             |       |                                     |