

Description

LED WAFER WITH NIGHT LIGHT features a 2000K glow for soft nighttime visibility. Trim-edge illumination creates ambiance without overpowering the room. Includes J-box, plug & twist connector, and spring clips for quick installation. Works on 120V circuits with triac dimming



VARIETY - Available in 4-inch and 6-inch round shapes, this fixture comes in White and Black finishes to complement any design preference.

MEMORY FUNCTION - Wafer with night light includes a memory function that ensures the light always starts in downlight mode. If multiple fixtures fall out of sync, switch them off and back on after 1–5 seconds to restore uniform operation.

FUNCTIONS - The fixture supports two modes: main light and 2000K night light. Switching is controlled by power cycling. Choose from 2700K–5000K color temperatures. Both modes are dimmable via standard or dimmer switches, with smooth triac dimming from 10% to 100%.

INSTALLATION - This fixture is IC rated so there is no can or any other housing required. It is also Wet Locations rated for added versatility.

ADVANTAGES - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety



Dimensions

4-15/16" x 4-15/16" x 7/8"
6-7/8" x 6-7/8" x 7/8"

Ordering Info:

Model	Size	Shape	Watts	Voltage	Dimmable	Lumens	CCT	Finish
EL-JBR-NL	4.0" 6.0"	Round	9W+3W 12W+3W	120V	TRIAC	782lm 1,071lm	2700K 3000K 3500K 4000K 5000K Night Light	White Black

PRODUCT SPECIFICATIONS	
Housing	Aluminum
Lens	PS
Beam Angle	112°
Finish	Black / White
Environmental system	
Work environment	Suitable for Wet Locations
Operating temperature	-4°F to 104°F (-20°C to 40°C)
L-70 Life	> 50,000 hrs
Optical system	
Color temperature	5CCT switch (2,700/3,000/3,500/4,000/5,000 K), Night Light
CRI	> 90
Electrical system	
Input voltage	120V
Power consumption	9W+3W / 12W+3W
Output voltage	36V
Dimming range	TRIAC
Certifications	ETL certified
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.


2. Open junction box. Connect the wires: Black to Black, White to White, Copper to Green. Secure the connection with quick connector.

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

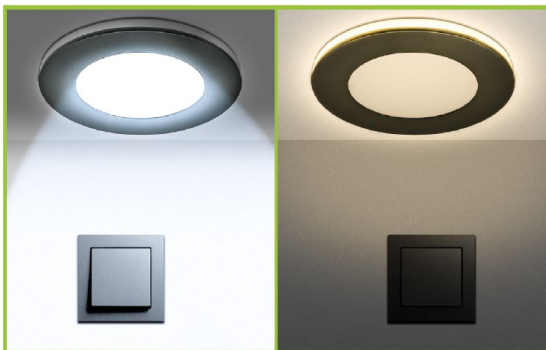

INSTALLATION STEPS

1. Use template to cut an appropriate sized hole. Disconnect the fixture from the junction box. Choose needed color temperature by adjusting the switch. Close the junction box.
2. Open junction box. Connect the wires: Black to Black, White to White, Copper to Green. Secure the connection with quick connector.
3. Insert the junction box into the cut hole, leaving the connection cable outside. Connect the fixture to the Junction box inserting the cable and securing it with a cap. Push the spring loaded clips upwards and insert the fixture base in to the mounting hole. Release the clips, so the fixture fits securely.

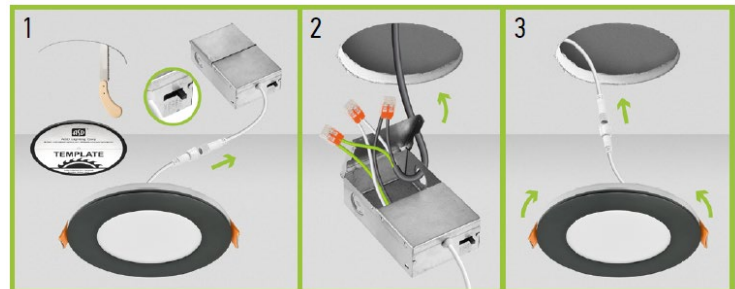

NIGHT LIGHT SETTINGS:

1. TWO LIGHTING MODES

Fixture offers two modes: main light with full brightness (2700K–5000K) and night light with soft 2000K glow for gentle nighttime illumination.

2. EASY MODE SWITCHING

Switching between modes is done via power cycling—turn the fixture off and on to toggle.

3. AUTOMATIC MEMORY

The light always starts in main light mode when powered on.

4. SYNC FUNCTION

If multiple fixtures fall out of sync, turn them off and back on within 1–5 seconds to restore uniform operation.