6” Architectural Downlight

ESTELLES LIGHTING

WARRANTY & LISTINGS

- *cETLuslisted for wet locations (new construction).*
- *cETLusclassified for wet locations (retrofit).*
- *Energy Star certified.*
- *Title 24 compliant.*
- *Complies with FCC Part 15, class A.*
- *5-year warranty of all electronics and housing.*

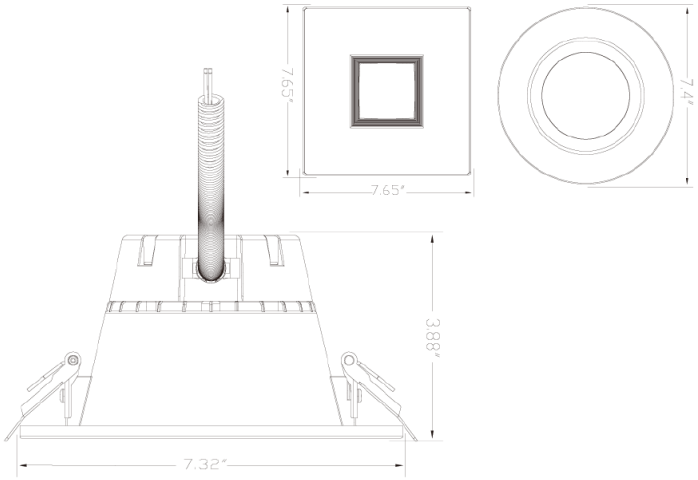

FEATURES

- Available in 3500k, 4000k, and 5000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 50,000 hours of operation.**
- Provides 1,500 nominal lumens.
- 17 nominal watts.
- Color rendering index (Ra) > 80.
- 120-277 (50-60Hz) AC voltage is standard.
- Power factor > 0.90.
- 0-10V dimming.
- Thermoplastic and aluminum construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs and flexible conduit.
- Compatible with insulated, non-insulated, and air-tight ceilings.
- Compatible with 6.25” ceiling cut-outs and most 6” mounting frames.
- This device is not intended for use with emergency exits.

ORDERING INFORMATION

Model	Trim Type		Color Temperature	Accessories (Order Separately)	
IL- BRK-LED6A	BW	Baffle	35K	3500K	LED56-TRMPLT-ECO-SQ	Square snap trim
			4K	4000K	LED6A-TRMPLT-ECO-SPWHT	Specular white snap trim
			5K	5000K	LED56-TRMPLT-ECO-BK	Black snap trim
					LED56-TRMPLT-ECO-N	Nickle snap trim
					LED56-TRMPLT-ECO-BZ	Bronze snap trim
					BL6CLED-ND	Mounting frame with j-box

Estelles Lighting

12603 FM 529 Rd Houston TX Phone: (713) 270-6800