


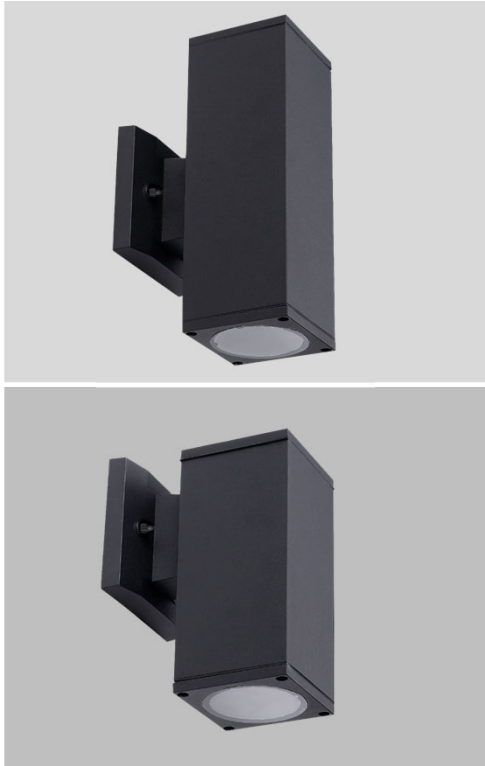

Dimensions (LxWxH)

Round

4-3/8" x 6-7/16" x 7-7/8"
4-3/8" x 6-7/16" x 11-13/16"

Square

5-13/16" x 4-3/8" x 7-7/8"
5-13/16" x 4-3/8" x 10-1/4"

Description

BULB OUTDOOR WALL CYLINDER has a modern design with single or double light directions. This E26 base fixture is made from die-cast aluminum and a tempered glass cover. The high quality reflector creates a 50° beam angle. Round and Square shape available to fit any interior/ exterior installation.

PHOTOCELL- The built-in Dusk to Dawn Photocell will automatically turn the fixture on/off depending on the time of day.

COLOR SELECTABLE - You can choose either a 3,000K warm white, 3,500K neutral white, 4,000K cool white, or 5,000K daylight color temperature

BULBS - The fixture includes a standard E26 medium base. We recommend to use LED A19 bulb.

APPLICATION - - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

ADVANTAGES - With a lifespan of 54,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety



Finish: Nickel Bronze Black

Ordering Info:

Model	Light direction	Watts max	Voltage	Bulb Type	Finish
EL-OCLS-1	1 2	60W	120V	E26 60W max	White Oil rubbed bronze Black Nickel

PRODUCT SPECIFICATIONS

Housing	Aluminum
Lens	Glass
Finish	White, Nickel, Oil rubbed bronze, Black

Environmental system

Work environment	Suitable for Wet Locations
Operating temperature	-40°F to 113°F (-40°C to 45°C)
L-70 Life	> 54,000 hrs

Optical system

Color temperature	3CCT switch (3,000/4,000/5,000 K), 3,000 K by default
CRI	> 80

Electrical system

Input voltage	120 V
Power consumption	60W Max
Light source type	Incandescent/LED/CFL bulb
Surge protection DM/CM	1.25 kV / 1.25 kV
Certifications	ETL certified
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

