

Description


- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- High transparent PC diffuser, it can effectively prevent yellowing and aging.
- Indirect light luminaire for use with led, which has high visual comfortable.
- High quality LED chips, Driver with 0-10V/DALI/programmed options.
- Surface anti-ultraviolet pure polyester powder painting.
- The maximum surface temperature of all accessible part under 122°F.
- **Other Options:** Move sensor options / Emergency options / Color temperature options

Dimensions



Dimensions

L: 5.9" x W: 5.9" x H: 25" / 31" / 39"

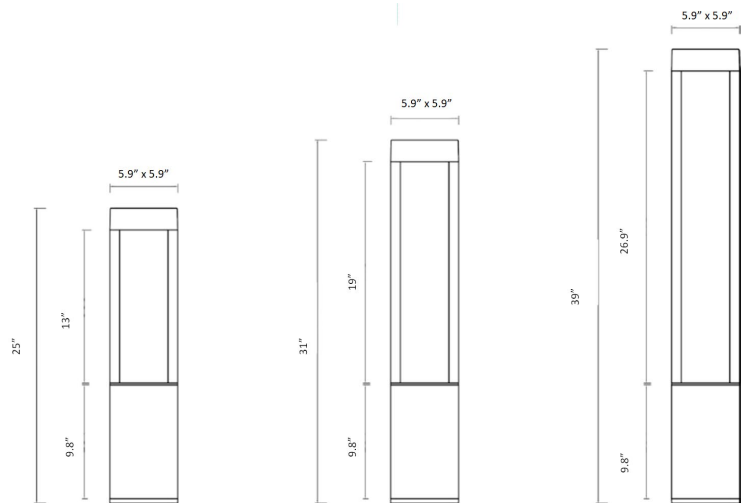

Ordering Info:



Model	Watts	Lumens	Sizes (H)	Color Temperature	Finishes	Accessories (Order Separately)
EL-2040	20W 30W	1234lm	25" 31" 39"	30 - 3000K 4K - 4000K 5K - 5000K	Black Matt Silver	ABAnchor-Anchor Bolt Kit

PRODUCT SPECIFICATIONS

Housing	Aluminum
---------	----------

Lens	Polycarbonate Lens
------	--------------------

Finish	Black, Matt Silver
--------	--------------------

Environmental system

Work environment	Suitable for Wet Locations
------------------	----------------------------

Operating temperature	-30°F to 122°F (-30°C to 50°C)
-----------------------	--------------------------------

L-70 Life	> 50,000 hrs
-----------	--------------

Electrical system

Input voltage	120V
---------------	------

CRI	≥ 80
-----	------

IK Rating	IK05
-----------	------

Light source type	LED
-------------------	-----

IP	IP65
----	------

Lumens	598lm , 897lm
--------	---------------

Power consumption	20W, 30W
-------------------	----------

Certifications	cETLus certified
----------------	------------------

Warranty	5-year limited
----------	----------------