


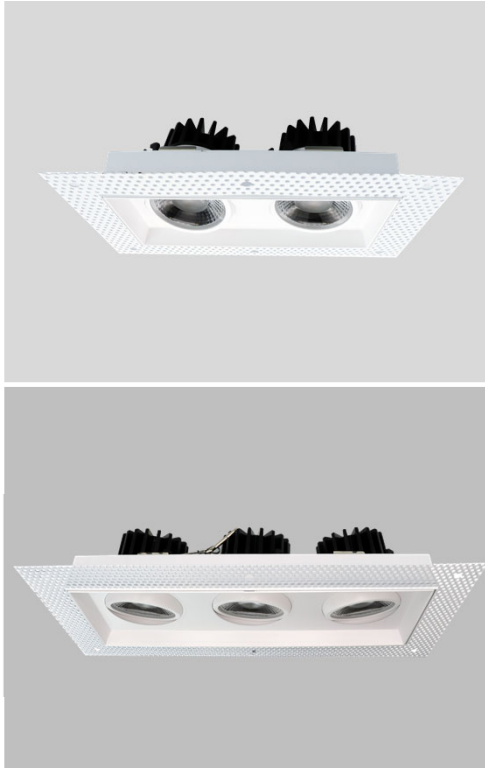

Dimensions (LxWxH)

Head 1: 6-3/8" x 6-3/8" x 3-1/8"
Heads 2: 10-1/8" x 6-3/8" x 3-1/8"
Heads3: 13-15/16" x 6-3/8" x 3-1/8"

Ordering Info:

Model	Size	Light heads	Watts	Voltage	Dimmable	Lumens	CCT	Finish
EL-HM08D	3.5"	1	15W	120V	TRIAC	1203lm	2700K	White
	3.5"	2	30W			2043lm	3000K	
	3.5"	3	45W			3215lm	3500K	
							4000K	
							5000K	

Description

LED TRIMLESS COMBO DOWNLIGHT with multi-directional adjustable swivel heads produces a high light output with minimal glare as a result of its regressed light source. It includes a mud frame to be plastered over, giving it a smooth trimless look. It features durable airtight aluminum housing, multifaceted specular reflector with a 38° beam angle, and anti-glare PC lens. It is designed to operate on 120V circuits with triac dimming.

COLOR SELECTABLE - You can choose either a 2,700K soft white, 3,000K warm white, 3,500K neutral white, 4,000K cool white, or 5,000K daylight color temperature.

CRI90+ - rating provides rich and natural colors and keeps your space looking and feeling vibrant. True bright colors can also improve your mood and general health.

INSTALLATION - This fixture is IC rated so there is no can or any other housing required. It is also Wet Locations rated, making it perfect for any spaces with humidity requirements. Perfect for retail, hospitality, or any other commercial space with a high ceiling.

ADVANTAGES - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety



PRODUCT SPECIFICATIONS

Housing Aluminum

Lens PC

Finish White

Environmental system

Work environment Suitable for Damp Locations

Operating temperature -4°F to 104°F (-20°C to 40°C)

L-70 Life > 50,000 hrs

Optical system

Color temperature 5CCT switch (2,700/3,000/3,500/4,000/5,000 K), 3,000 K by default

CRI > 90

Electrical system

Input voltage 120V

Max input current 0.15 A / 0.30 A / 0.45 A

Inrush current (Action time) 6 A (0.5 S)

Power consumption 15W / 30W / 45W

Output voltage 36V

Dimming range 10-100%

Certifications ETL certified

Warranty 5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:


Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

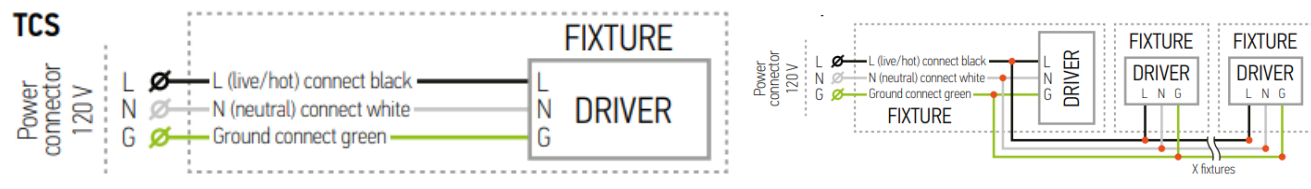

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

