



Dimensions (LxWxH)

4-3/4" x 1-9/16" x 2-13/16"

Description



LED SWIVEL HARDSCAPE LIGHT has 12V low-voltage design ensuring its safety when used outdoors (transformer is not included). Swivel light head allows you to adjust the illumination angle from 0-90 degree. Durable waterproof housing is resistant to rust and can be used outdoor for all weather conditions. The PC lens with a 115° beam angle grants you even light distribution.

COLOR SELECTABLE - You can choose either a 2,200K soft warm white, 2,700K soft white, 3,000K warm white, 4,000K cool white, or 5,000K daylight color temperature.

CUTTABLE DESIGN - Adjustable width by cutting along the dotted line in accordance with your needs

APPLICATION - This fixture is rated for Wet Locations. It is perfect for mounting between hardscapes like retaining walls, barbecue fire pits, bricks, landscape steps, masonry walls, etc.

ADVANTAGES - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety



Ordering Info:

Model	Watts	Voltage	Dimmable	Lumens	CCT	Finish	Option
EL-LSTL-H01W-D3CC	3W	120V	TRIAC	114lm	3000K 4000K 5000K	White Oil rubbed bronze Black	Motion sensor Photocell

PRODUCT SPECIFICATIONS

Housing	Aluminum
Lens	Acrylic
Finish	White, Oil rubbed bronze, Black
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	-40°F to 113°F (-40°C to 45°C)
L-70 Life	> 50,000 hrs
Optical system	
Color temperature	3CCT switch (3,000/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120V
Max input current	0.63 A
Inrush current (Action time)	0.02 A (0.02 S)
Power consumption	3W
Power factor	> 0.9
Certifications	ETL certified
Warranty	5-year limited

INSTALLATION GUIDE


IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

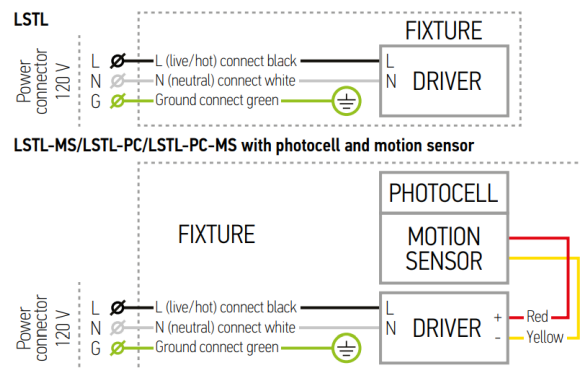

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

