

Description

DESIGN - LED VANITY LINEAR LOFT has a sleek, modern design that allows you to have a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The acrylic lens with a 130° beam angle grants you even light distribution. It is designed to operate on 120V circuits.

COLOR SELECTABLE - You can choose either a 2,700K soft white, 3,000K warm white, 3,500K neutral white, 4,000K cool white, or 5,000K daylight color temperature..

DIMMING - Smooth Triac dimming capabilities ranging from 10% to 100% with modern LED dimmers allow you to control the look and feel of your space.

APPLICATION - - This fixture creates a bright light that is perfect for bathroom spaces or any other common areas. It is also Damp Locations rated. Can be installed vertically and horizontally.

ADVANTAGES - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety

Dimensions (LxWxH)

19-1/16" x 5-1/4" x 3-11/16"

25-1/2" x 5-1/4" x 3-11/16"

37-1/16" x 5-1/4" x 3-11/16"

49" x 5-1/4" x 3-11/16"



5 LIMITED 5 YEAR
WARRANTY

Finish:

Nickel

Black

Ordering Info:

Model	Size	Watts	Voltage	Dimmable	Lumens	5-Selectable CCT	Finish
EL-LVF-LF-18D20AC	18"	20W	120V	TRIAC	1462lm	2700K	Nickel Black
EL-LVF-LF-24D20AC	24"	25W			1939lm	3000K	
EL-LVF-LF-36D20AC	36"	30W			2515lm	3500K	
EL-LVF-LF-48D20AC	48"	35W			3098lm	4000K	
						5000K	

PRODUCT SPECIFICATIONS

Housing	Steel
Lens	Acrylic
Finish	Nickel, Black
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	-4°F to 113°F (-20°C to 45°C)
L-70 Life	> 50,000 hrs
Optical system	
Luminous flux	1462 / 1939 / 2515 / 3089 lm
Color temperature	5CCT switch (2,700/3,000/3,500/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120 V
Max input current	0.2 A / 0.25A / 0.32A / 0.38A
Inrush current (Action time)	0.16 A (0.1 S) / 0.21 A (0.1 S) / 0.27 A (0.1 S) / 0.33 A (0.1 S)
Power consumption	20W / 25W / 30W / 35W
Power factor	> 0.9
Surge protection DM/CM	1.25 kV / 1.25 kV
Dimming range	10-100%
Certifications	cETLus certified
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:


Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

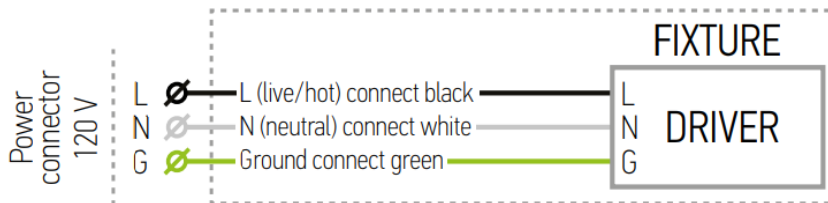

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

