

Description


LED WALL SCONCE LOFT has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The acrylic lens with a 215° beam angle grants you even light distribution. It is designed to operate on 120V circuits

COLOR SELECTABLE - You can choose either a 2,700K soft white, 3,000K warm white, 3,500K neutral white, 4,000K cool white, or 5,000K daylight color temperature

DIMMING - Smooth Triac dimming capabilities ranging from 10% to 100% with modern LED dimmers allow you to control the look and feel of your space.

APPLICATION - The LED WALL SCONCE LOFT provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. This fixture is also Damp Locations rated.

ADVANTAGES - With a lifespan of 54,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety

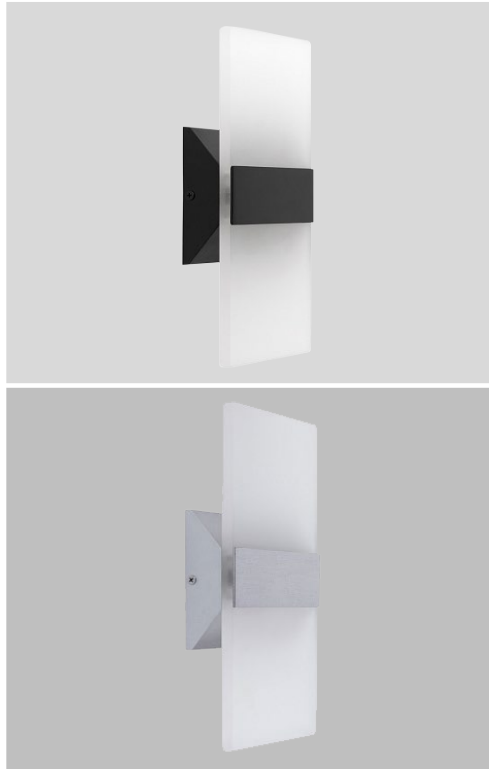

Ordering Info:

Model	Size	Watts	Voltage	Dimmable	Lumens	CCT	Finish
EL-LWS12-12D12AC	12"	12W	120V	TRIAC	Up to 861 lm	2700K	Nickel
						3000K	Black
						3500K	
						4000K	
						5000K	

PRODUCT SPECIFICATIONS

Housing	Aluminum
Lens	Acrylic
Finish	Brushed nickel, Black
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	-4°F to 113°F (-20°C to 45°C)
L-70 Life	> 54,000 hrs
Optical system	
Luminous flux	1,050/1,107/1,080 lm
Color temperature	5CCT switch (2,700/3,000/3,500/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120 V
Max input current	0.12 A
Inrush current (Action time)	40 A (0.01 S)
Power consumption	12W
Power factor	> 0.9
Output voltage	36 V
Dimming range	10-100%
Certifications	UL certified
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:


Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

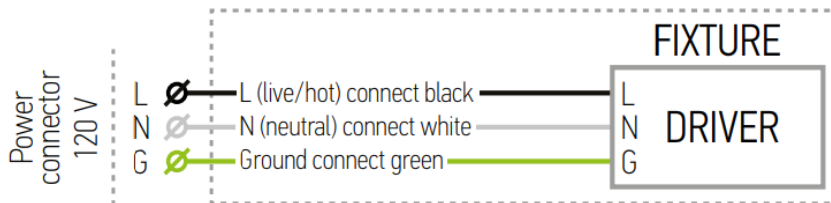

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

