



Description


LED WALL SCONCE LED OUTDOOR WALL SCONCE has a modern, multipurpose design and a stylish look with efficient lighting. The UV resistant PMMA lens with a 160° beam angle grants you even light distribution. It is designed to operate on 120-277V circuits and provides smooth triac dimming capabilities ranging from 10% to 100%.

COLOR SELECTABLE - You can choose either a 3,000K warm white, 4,000K cool white or 5,000K daylight color temperature.

Durable waterproof housing resistant to rust and impact can be used outdoors in all weather conditions.

APPLICATION - - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

ADVANTAGES - With a lifespan of 54,000 hours, these fixtures are made to last decades under normal operation! Estelle's provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety



Finish:

Bronze

Black

Ordering Info:

Model	Size	Watts	Voltage	Dimmable	Lumens	CCT	Finish
EL-OLWS-22-MV	12"	15W	120-277V	-	Up to 1,010 lm	3000K	Oil rubbed bronze
	18"	20W			Up to 1,515 lm	4000K	Black
	24"	23W			Up to 1,970 lm	5000K	
	36"	28W			Up to 2,690 lm		

PRODUCT SPECIFICATIONS

Housing	Steel
Lens	PMMA
Finish	Oil rubbed bronze, Black, Matte black
Environmental system	
Work environment	Suitable for Wet Locations
Operating temperature	-40°F to 113°F (-40°C to 45°C)
L-70 Life	> 54,000 hrs
Optical system	
Color temperature	3CCT switch (3,000/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120-277 V
Max input current	0.15 A
Inrush current (Action time)	0.16 A (0.2 S)
Power consumption	15W, 20W, 23W, 28W
Power factor	> 0.9
Output voltage	30-38 V
Dimming range	-
Certifications	ETL certified
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:


Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

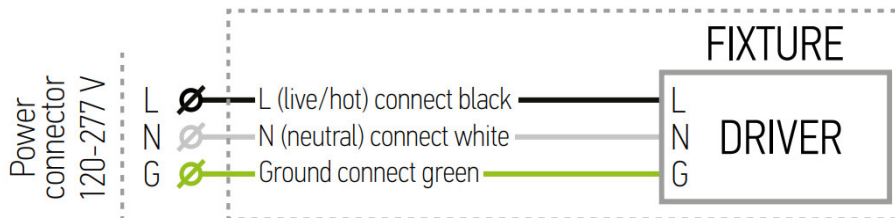

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

