



Specifications

Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
CCT	3000K - 4000K - 6000K-R-G-B-RGB
Beam Angle	25° / 45° / 60°

	3000K - 285lm
LED Lumens	4W 4000K - 300lm
	6000K - 330lm

Ingress Protection	IP65
--------------------	------


Certifications	 
----------------	---

ICL001 LED 4W


Applications

Cylinder downlight for mounting to outdoor canopy or indoor ceiling with narrow and wide beam choices and optional dimming to provide under-canopy general lighting. DMX controlled color changes available. Choices of housing color allow the luminaire to blend perfectly with ceiling/canopy color.

Dimensions

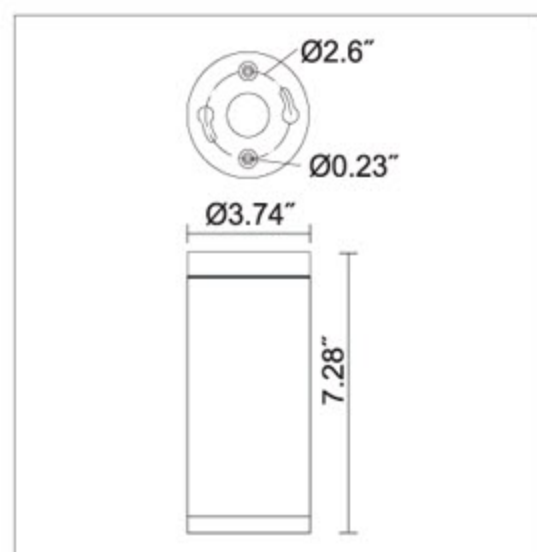

Photometric data

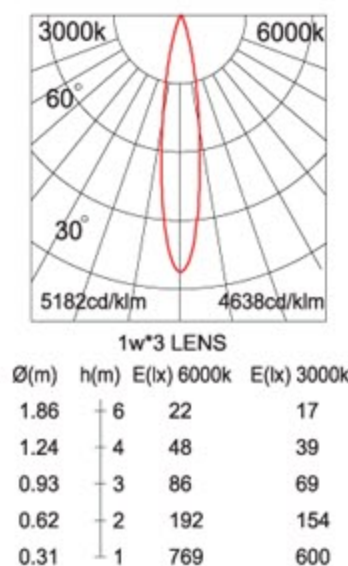

Ordering Guide:

Example: ICL001 - C4 - 3 - 25 - 80 - NDM - RAL7012

1	2	3	4	5	6	7	8
Series	Power	CCT	Beam angle	Ra	Control	Housing Color	Accessories
ICL001	C4: Cree 1WX3	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGB: RGB	15: 15° 25: 25° 45: 45° 60: 60°	80: Ra80 90: Ra90	NDM: No dimming DMG: 0-10V Dimming DMX: DMX Decoder	B: Black RAL XXXX: Color by RAL number	M: Marine ambient corrosion resistance