




ICL013 LED 11W

Applications

Cylinder downlight for mounting to outdoor canopy or indoor ceiling with narrow and wide beam choices and optional dimming to provide under-canopy general lighting. DMX controlled color changes available. Choices of housing color allow the luminaire to blend perfectly with ceiling/canopy color.


Dimensions

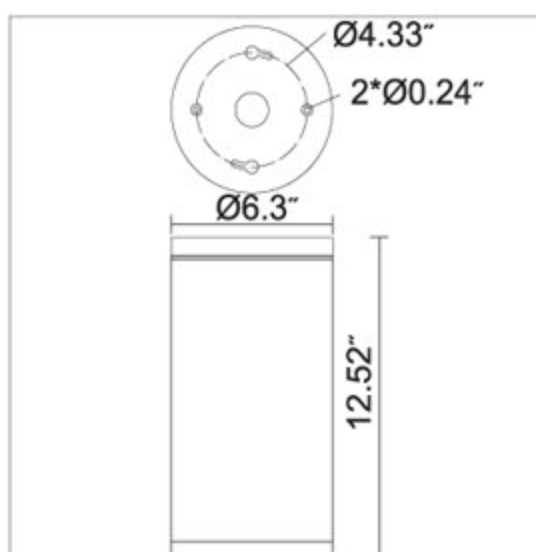

Specifications

Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
CCT	3000K - 4000K - 6000K-R-G-B-RGB
Beam Angle	12° / 25° / 60°
LED Lumens	3000K - 910lm 11W 4000K - 900lm 6000K - 990lm
Ingress Protection	IP65
Certifications	 

Photometric data

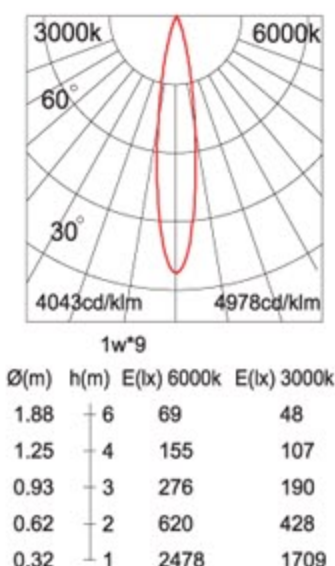

Ordering Guide:

Example: ICL013 - C11 - 3 - 25 - 80 - NDM - RAL7012

1	2	3	4	5	6	7	8
Series	Power	CCT	Beam angle	Ra	Control	Housing Color	Accessories
ICL013	C11: Cree 1WX9	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGB: RGB	12: 12° 25: 25° 60: 60°	80: Ra80 90: Ra90	NDM: No dimming DMG: 0-10V Dimming DMX: DMX Decoder	B: Black RAL XXXX: Color by RAL number	M: Marine ambient corrosion resistance