


Surface Mounted Step Lights


IL-ET2005



DIMENSION:

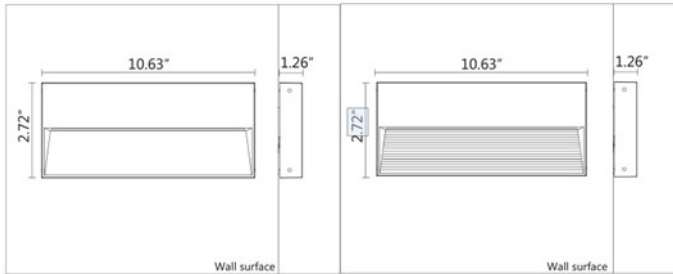

PHOTOMETRIC:

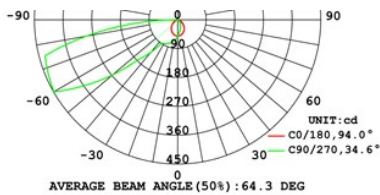

IL-ET2005-C15-3-80-SM-B

LED luminous flux:

Luminaire flux: 486lm

Catalog #		Type
Project		
Comments		Date
Prepared by		

FEATURES:

Housing:

Die casting aluminum cover and housing. Stainless steel screws and mount plate. Imported silicon rubber .

Finish:

Exterior parts are protected by a thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

Optical system:

High power led 3-step McAdam Ellipse. Optics are engineered for superior field-to-beam ratios.

Mounting:

LED Surface Mounted Step Lights are suitable for wet locations on the wall surface.

ELECTRICAL:

Input Voltage: 120V/ 277V AC

Wattage: 15W

Color Temperature: 3000K, 4000K, 6000K

CRI: ≥ 80

IP rated: IP64

Ordering Example: IL-ET2005

Series	Power	Voltage	Color Temp.	CRI	Baffle	Housing Color	Options
IL-ET2005	1 = 15W	1 = 120V 2 = 277V	1 = 3000K 2 = 4000K 3 = 6000K	≥ 80	1 = Smooth 2 = Stepped	1 = Black RAL9011 2 = White RAL9016 3 = Gray RAL7012 4 = Mineral bronze 5 = Silver RAL9006	1 = Marine ambient corrosion resistance 2 = 0-10V Dimming

IL-ET2005

Last update: Mar , 2020

Due to continuous improvements, the information herein may be changed without notice