

| Catalog #   | Type |
|-------------|------|
| Project     |      |
| Comments    | Date |
| Prepared by |      |

## Description

Introducing our Economic, Versatile, High-Performance Floodlight Family, a lighting solution that checks all the boxes for your diverse needs. This family of floodlights offers exceptional value without compromising on versatility or performance. With multiple mounting configurations available, these floodlights can be tailored to fit any application seamlessly.

With the flexibility to choose from various mounting options, you can easily adapt these floodlights to suit your unique requirements. Experience the perfect blend of affordability, adaptability, and performance with our Economic, Versatile, High-Performance Floodlight Family. Illuminate your world with confidence, knowing you have the right lighting solution for every application.

## Certification Information



3000K

4000K

## FEATURES

- Economic, versatile, high performance flood family with multiple mounting configurations to fit any application
- Impact & weather resistant fixture with die cast housings and tempered glass lenses
- Button Photocell and 3/7 pin twist lock receptacle as an option.
- Name brand chip and driver @ 5 year


|                       |                                    |
|-----------------------|------------------------------------|
| Product Specification | Flood Light                        |
| Mode                  | IL-FLL3                            |
| CCT                   | 3000K, 4000K,                      |
| Material              | Aluminum                           |
| Dimensions            | 7.77"L x 5.10"H x 4.13"W           |
| CRI                   | ≥ 70                               |
| Finishes              | Bronze, Silver, White, Gray, Black |
| Power                 | 20W, 50W,                          |
| Input Voltage         | 120V / AC                          |
| Dimming               | Non Dimming<br>Dimming             |
| Suitable              | Wet locations                      |
| OPERATING TEMP        | -30° ~ +40°C                       |
| Lumens                | 2360lm, 6328lm,                    |
| Certification         | UL Listed                          |
| Warranty              | 5 years                            |

## ORDERING INFORMATION

| ITEM NUMBER | WATTAGE | CCT   | LUMENS | CRI  | OPTIONS      | DIMMING OPTION | VOLTAGE | FINISH | MOUNTING    | MECHANICAL ACCESSORIES |
|-------------|---------|-------|--------|------|--------------|----------------|---------|--------|-------------|------------------------|
| IL-FLL310   | 20W     | 4000K | 2360lm | ≥ 70 | PC= Potocell | Non Dimming    |         | Bronze | Slip Fitter | Standard               |
| IL-FLL320   | 50W     | 5000K | 6328lm |      | NA= None     | Dimming        | 120V    | Sliver | Trunnion    | Visor                  |
|             |         |       |        |      |              |                |         | White  | Knuckle     | Wire Guard             |
|             |         |       |        |      |              |                |         | Gray   |             | Vandal Shield          |
|             |         |       |        |      |              |                |         | Black  |             |                        |

Due to continuous improvements, the information herein may be changed without notice

Dimension

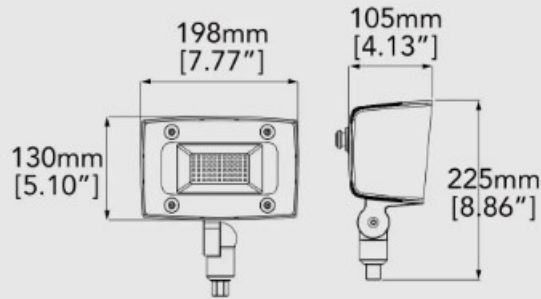

PHOTOMETRIC DATA

