


IL7028 LED 8W, 16W



No shroud



Angled
retractable shroud



Open straight
retractable shroud

FEATURES:

LED accent light with multiple beam patterns and retractable shrouds, twin heads each 360° rotatable and 180° tiltable, ideally suited for accent lighting. Mounting bracket supports two fixtures, aiming of each independently adjustable. TRIAC dimming standard.

PRODUCT DESCRIPTION:

This model is specially designed for medium power of COB LED, compact and widely applied, two kinds of watts for option. Die casting aluminum housing and optimized heat dissipation structure ensure longer lifetime and better stability. Precise lighting distribution, various lighting beam angles make it applied in different places and projects. 360°horizontal rotate and 180°vertical adjust. Applied in different outdoor areas, such as architectures, buildings, lawn, garden and etc...

SPECIFICATION :


- **Product Specification** IL7028 LED 8W, 16W
- **CCT** 3000K, 4000K,
- **Housing** Die-cast aluminum
- **Finishes** AkzoNobel powder coating
- **Input Voltage** 120V or 277V (Please Specify)
- **Wattage** 8W, 16W
- **Gasket** Silicone rubber
- **Front Cover** Tempered Glass
- **LED Optic** Polycarbonate Lens
- **Driver Type** Constant current, TRIAC dimming standard
- **Ingress Protection** IP65
- **Ambient Temperature** -20°C~45°C

WARRANTY:

Five-years limited warranty.



Dimensions

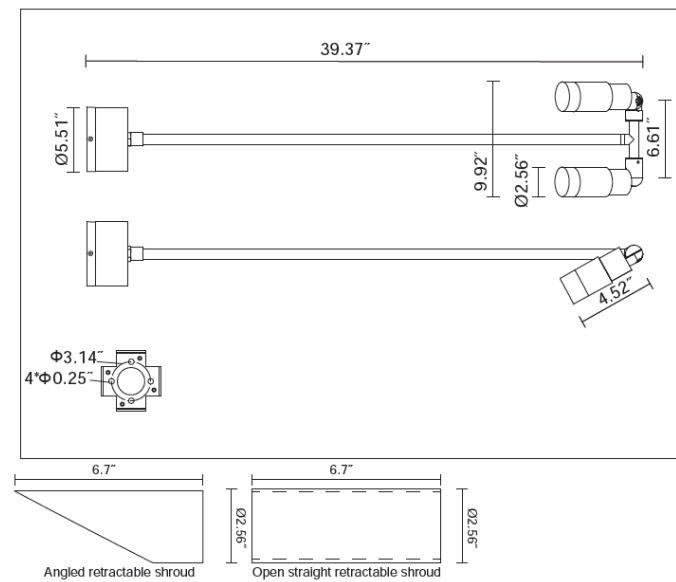

Options and Accessories



Shroud

No shroud Angled retractable shroud Open straight retractable shroud



Housing Color

Black RAL9011 White RAL9016 Gray RAL7012 Mineral bronze Silver RAL9006



Horizontal spread
H40°xV20°



Honeycomb Louver

IL7028 LED 8W, 16W

Ordering Example: IL7028-8W-30K-15

Series	Watts	Size	Beam Angle	RA	Sround	Housing Color	Accessories
IL7028	1 - 8W	1 - 3000K	1 - 15	1 - Ra80	1 - Nos shroud	1 - Black RAL9011	1 - Honeycomb Louver
	2 - 16W	2 - 4000K	2 - 25		2 - Angled retractable shroud	2 - White RAL9016	2 - Marine ambient corrosion resistance
			3 - 30		3 - Open straight retractable shroud	3 - Gray RAL7012	3 - (TRIAC dimming standard)
			4 - H30°xV12°			4 - Mineral bronze	
						5 - Silver RAL9006	

Last update: 2020

Due to continuous improvements, the information herein may be changed without notice