

IL7067 LED 10W, 15W



PRODUCT DESCRIPTION:

This model is specially designed for medium power of COB LED, compact and widely applied, two kinds of watts for option. Die casting aluminum housing and optimized heat dissipation structure ensure longer lifetime and better stability. Precise lighting distribution, various lighting beam angles make it applied in different places and projects. 360°horizontal rotate and 180°vertical adjust. Applied in different outdoor areas, such as architectures, buildings, lawn, garden and etc...

SPECIFICATION :

- **Product Specification** IL7067 LED 10W, 15W
- **CCT** 2700K, 3000K, 4000K, 5000K
- **Housing** Die-cast aluminum
- **Finishes** AkzoNobel powder coating
- **Input Voltage** 120V or 277V (Please Specify)
- **Wattage** 10W, 15W
- **Gasket** Silicone rubber
- **Front Cover** Tempered Glass
- **LED Optic** Polycarbonate Lens
- **Driver Type** Constant current, TRIAC dimming standard
- **Ingress Protection** IP65
- **Ambient Temperature** -20°C~45°C

FEATURES:


LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. Mounting bracket extends fixture setback to enable broader coverage of target vertical surface while the miniature size keeps fixture and bracket images inconspicuous. TRIAC dimming standard.

WARRANTY:

Five-years limited warranty.



Dimensions

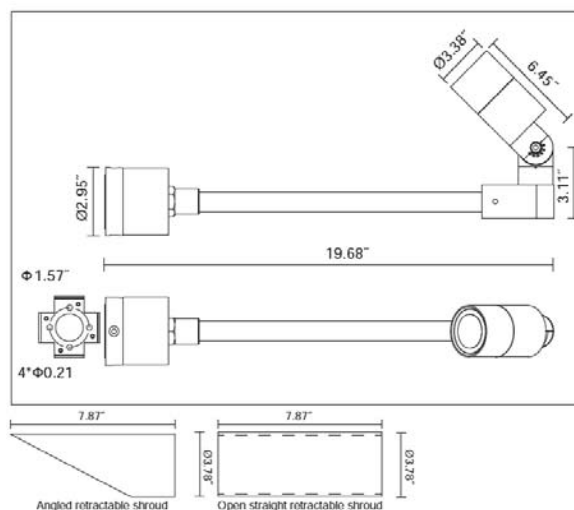

Options and Accessories



Shroud

No shroud

**Angled retractable
shroud**

**Open straight
retractable shroud**



Housing Color

Black RAL9011

White RAL9016

Gray RAL7012

Mineral bronze

Silver RAL9006



Horizontal spread
H40°xV20°

Honeycomb Louver

IL7067 LED 10W, 15W

Ordering Example: IL-4W-30K-15

Series	Watts	Size	Beam Angle	RA	Sround	Housing Color	Accessories
IL7067	1 - 4W	1 - 2700K	1 - 15	1 - Ra80	1 - Nos shroud	1 - Black RAL9011	1 - Honeycomb Louver
	2 - 8W	2 - 3000K	2 - 25		2 - Angled retractable shroud	2 - White RAL9016	2 - Marine ambient corrosion resistance
		3 - 4000K	3 - 30		3 - Open straight retractable shroud	3 - Gray RAL7012	3 - (TRIAC dimming standard)
		4 - 5000K	4 - H30°xV12°			4 - Mineral bronze	
						5 - Silver RAL9006	

Last update: 2020

Due to continuous improvements, the information herein may be changed without notice