



Dimensions (LxWxH)

11-13/16" x 11-13/16" x 3-1/2"

14" x 14" x 3-3/4"

15-5/16" x 15-5/16" x 3-11/16"

17-15/16" x 17-15/16" x 3-15/16"

19-1/8" x 19-1/8" x 4-1/8"

Description

DESIGN - LED FLUSHMOUNT LOFT has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact along with a acrylic lens provide many years of use. It is designed to operate on 120V circuits.

COLOR SELECTABLE - - You can choose either a 2,700K soft white, 3,000K warm white, 3,500K neutral white, 4,000K cool white, or 5,000K daylight color temperature.

DIMMING - Smooth triac dimming capabilities ranging from 10% to 100% with modern LED dimmers allow you to control the look and feel of your space

APPLICATION - The LED FLUSHMOUNT LOFT provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. This fixture is also Damp Locations rated.

ADVANTAGES - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!



5 LIMITED 5 YEAR
WARRANTY

Finish: Nickel Black

Ordering Info:

Model	Size	Watts	Voltage	Dimmable	Lumens	5 Selectable CCT	Finish
EL-LFMDR-10D16CC	12"	20W	120V	TRIAC	1130lm	2700K	Nickel Black
EL-LFMDR-12D15CC	14"	24W			1534lm	3000K	
EL-LFMDR-16D24CC	16"	28W			1752lm	3500K	
EL-LFMDR-18D28CC	18"	35W			2475lm	4000K	
	20"	42W				5000K	

PRODUCT SPECIFICATIONS

Housing	Iron
Lens	Acrylic
Finish	Nickel, Black
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	-4°F to 113°F (-20°C to 45°C)
L-70 Life	> 50,000 hrs
Optical system	
Luminous flux	1,570/1,900/2,535/3,125lm
Color temperature	5CCT switch (2,700/3,000/3,500/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120 V
Power consumption	20W / 24W / 28W / 35W / 42W
Power factor	> 0.9
Surge protection DM/CM	1.25 kV / 1.25 kV
Dimming range	10-100%
Certifications	cETLus certified / Energy Star listed
Warranty	5-year limited

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:


Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference. Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product. Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Estelle's assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

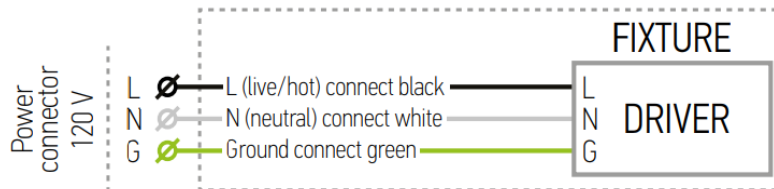

INSTALLATION STEPS:

1. Unscrew the two fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws.
2. Choose preferred color temperature on the back side of the fixture by adjusting switch position. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Fix the wall sconce to the mounting plate using two fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.

