

Product Specifications

Material: Sturdy powder coated aluminum housing. Salt mist resistance & anti aging. High thermal conductivity. High efficient reflector and diffuser. UV & Fire resistant high out put PC lenses.

Wattage: 50W

Led type: Phillips Lummi LED'S LUXEON 3030 2D.

Electrical: 120 ~ 277Vac, 50/60Hz Driver.

Power factor: $\geq 90\%$

Led efficiency: 130 lm/W


Color temperature: 5000K

Operation temperature: -20°C to 55°C


Color Rendering Index (CRI): 80

THD%: 20


IP Rating: IP65

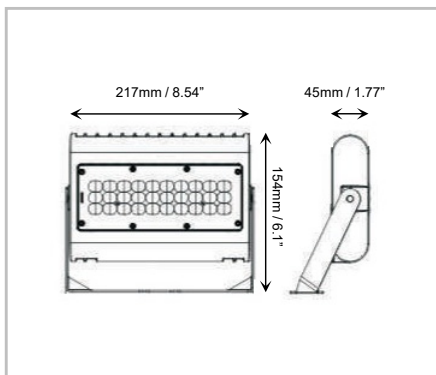

50W - U BRACKET

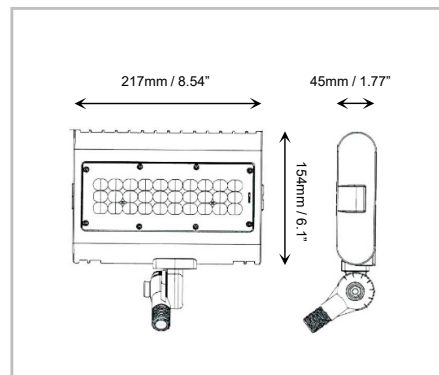

50W - KNUCKLE

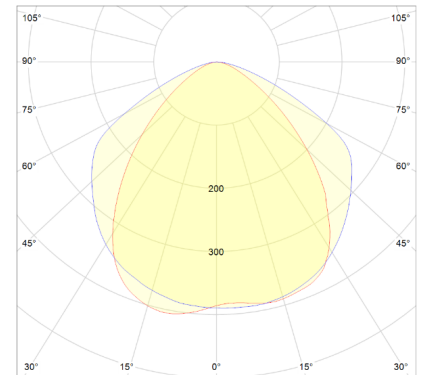

Ordering information



Ordering Example: LI-FLDF050-XYZ-50-A-1-BR-M1



Series

Wattage

Optic

Color Temp

Optional

Finish

Mounting

LI-FLDF050-XYZ

50W

A = 120 x 90

5000K

1 = Dimmable
2 = Motion Sensor
3 = Photocell

Br = Bronze

M1 = KNUCKLE
M2 = U Bracket
Trunnion