



Product Specifications

Housing: Die cast aluminum housing

Reflector: Reflector is specular aluminum.

Lens: Clear polycarbonate

Mounting: Wall mount. Attaches to standard 4" outlet box.

Electrical: 120 - 277V

Wattage: 50 watts.


Light Source: LED. L70 > 50,000 hours. CRI.

Finish: UV stabilized powder coat finish

Certification: UL/cUL, IP66, Lighting Facts, RoHS

WP03

Dimensional Drawings:

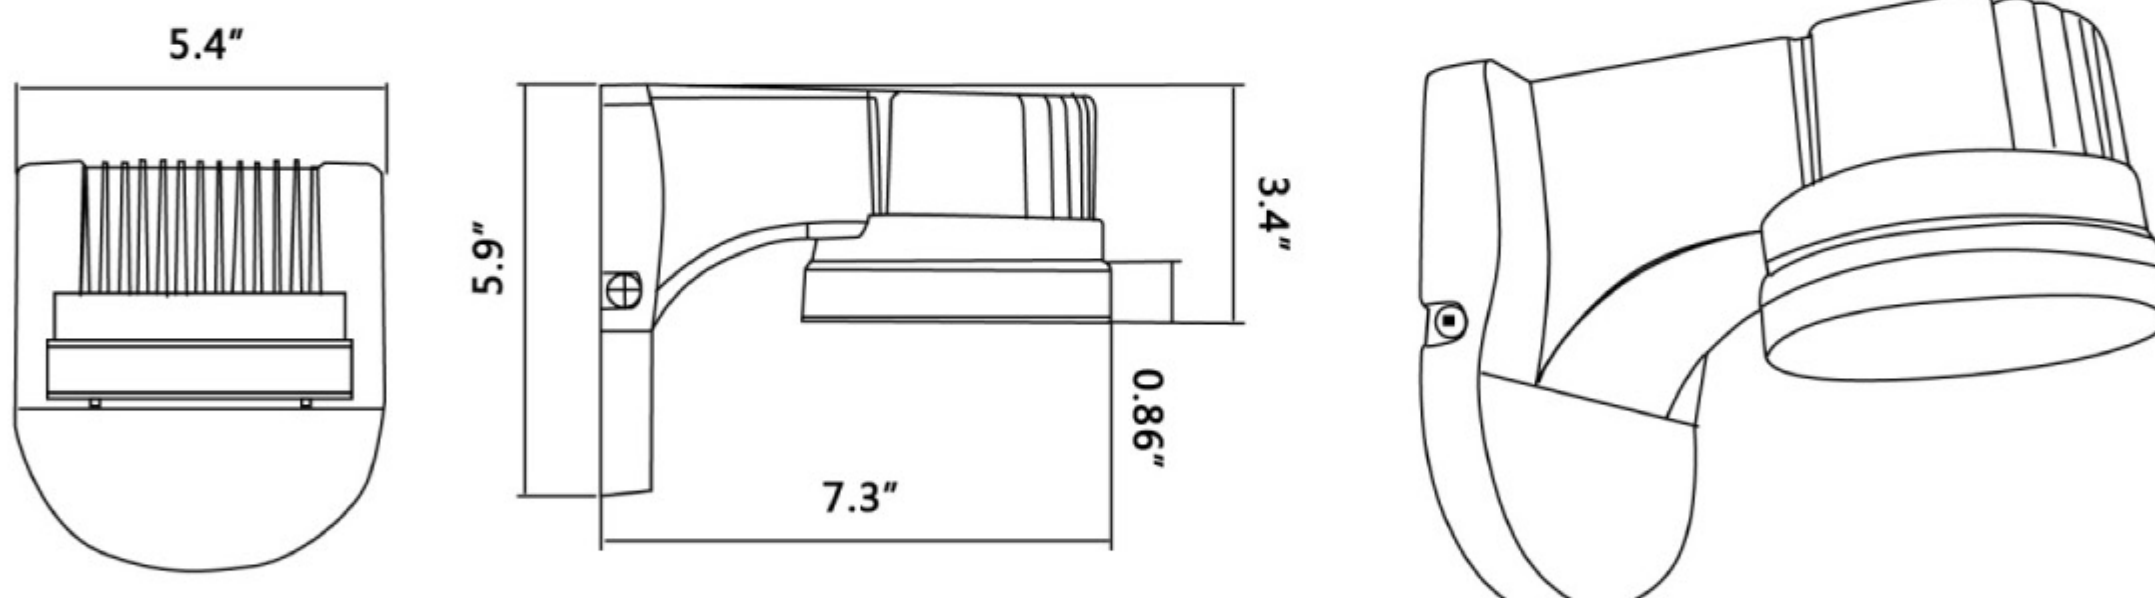

Ordering information

Example: WP03-5-LED-50-120-30-B

Series	Source	Wattage	Voltage	CCT	Finish	Options
WP03	LED=LED	50=50W	120=120 230=230	30=(3000K) 40=(4000K) 50=(5000K)	B= (Bronze) W*= (White) BK*= (Black) SL*= (Silver)	
Size 5=5						

*Consult Factory regarding availability.