



FEATURES :

- Up to 140 LPW ultra-high efficiency delivers superior performance over older HID fixtures
- Type III light distribution projects light outwards with a lateral width of 40 degrees
- Slipfitter adjusts up to 180 degrees (90° up and 90° down)
- 0-10V dimming

LISTINGS :

- IP65
- UL Listed for wet locations

PERFORMANCE :

- CRI: >80
- CCT: 3000K, 4000K, 5000K
- LED L70 Life Hours: ≥100,000 hours
- Light Distribution: Type III
- BUG: B4-U0-G5

ELECTRICAL :

- THD: ≤20%
- Power Factor: ≥0.9
- Input Voltage: 120-277V
- Dimmable power supply (0-10V)
- Surge Protection: 6kV

INSTALLATION

- Designed to be mounted with the included slipfitter mount; See installation instructions for more information

CONSTRUCTION

- Low profile die-cast aluminum housing
- Durable dark bronze powder coat finish
- Polycarbonate lens


Catalog # Type		Type
Project		
Comments		Date
Prepared by		

Product Specification	G5 Area Light Series
Mode	LI-AST-SG12C
CCT	3000K, 4000K, 5000K
Material	Die-Cast Aluminum
Dimensions	13"W x 20.5" L x 2.9" H
Finishes	Bronze
CRI	>80
Power	200W, 240W, 300W
Input Voltage	120-277V
Dimmable	0-10V
Light Distribution	Type III
Power Factor	≥0.9
Lumen	140LM/W
Operating Temperature	-22°F to 113°F
IP	IP65
Warranty	5 years


ORDERING INFORMATION

MODEL	WATTAGE SELECTABLE	SELECTABLE CCT/ LUMENS			OPTIC	ACCESSORIES	Finish
		3000K	4000K	5000K			
LI-AST-SG12C	200W	29,637lm	30,581lm	30,159lm	Type III	Slip Fitter Mount	Bronze
	240W	35,565lm	36,697lm	36,191lm		Arm Mount	
	300W	44,456lm	45,871lm	45,239lm		Wall Mount	


DIMENSIONS




AM





YM



A&D

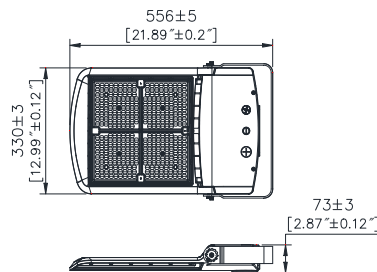

FM

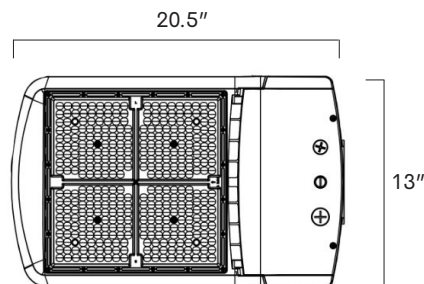

ACCESSORIES

Slipfitter



Trunnion




Arm mount



Optical Distributions

The Average Illuminance Effective Figure

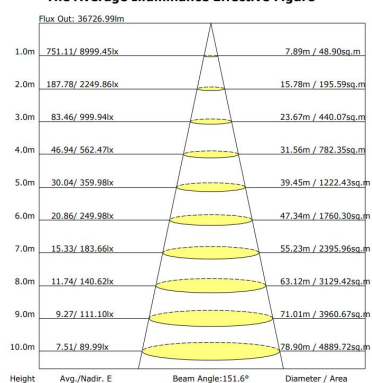

Luminous Intensity Distribution Curve

