

Description


DESIGN - LUV WALL SCNCE brings warmth to any space with its soft light and clean minimalist form. Its modern design makes it a versatile choice for various interior styles. The fixture rotates 360° around its base, while multiple units can be grouped to create unique lighting compositions. LUV-C models feature adjustable rods, allowing you to easily direct the light exactly where it's needed. It is designed to operate on 120V circuits with triac dimming..

VARIETY - Available in 24-inch and 28-inch sizes, this fixture comes in Black and Gold finishes to complement any interior style.

COLOR SELECTABLE -You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.


APPLICATION - This WALL SCNCE is perfect for creating a cozy and inviting atmosphere in living rooms, bedrooms, hallways, or other residential areas. Its warm glow adds comfort without overpowering the space. This fixture is also Damp Locations rated.

ADVANTAGES - With a lifespan of up to 50,000 hours, this fixture is built to last. ASD provides a 5-year limited warranty and ETL certification to ensure top-quality performance and safety.

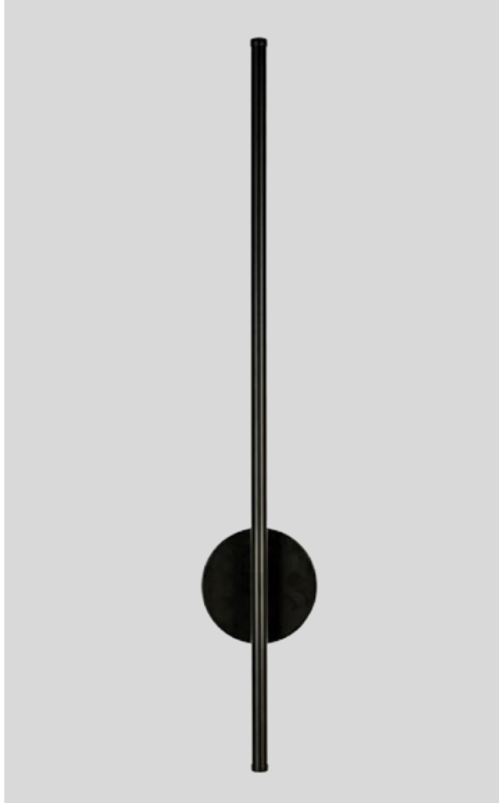

5 LIMITED 5 YEAR WARRANTY

Ordering Info:

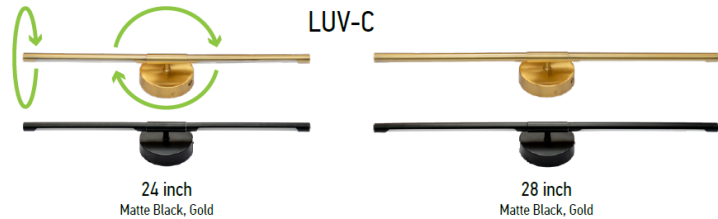

LUV-B

Model	Size	Wattage	Voltage	Lumen	Dimming	CCT	Finish	Dimensions
EL-LUV	24" 28"	8W 11W	120V	420lm 532lm	Triac	3000K 4000K 5000K	Matte	4-1/2" x 2-5/8" x 23-5/8" 4-1/2" x 2-5/8" x 27-9/16"

LUV-C

Model	Size	Wattage	Voltage	Lumen	Dimming	CCT	Finish	Dimensions
EL-LUV	24" 28"	8W 11W	120V	666lm 1064lm	Triac	3000K 4000K 5000K	Matte Gold	4-1/2" x 2-11/16" x 23-5/8" 4-1/2" x 2-11/16" x 27-9/16"

PRODUCT SPECIFICATIONS

Housing	Steel
Lens	Acrylic
Finish	Matte Black, Gold
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	-4°F to 113°F (-20°C to 45°C)
L-70 Life	> 50,000 hrs
Optical system	
Luminous flux	420lm, 532lm, 666lm, 1064lm
Color temperature	3CCT switch (3,000/4,000/5,000 K), 3,000 K by default
CRI	> 80
Electrical system	
Input voltage	120 V
Power consumption	8W / 11W
Power factor	> 0.9
Surge protection DM/CM	2 kV
Dimming range	Triac
Certifications	cETLus certified / Energy Star listed
Warranty	5-year limited

INSTALLATION GUIDE


IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ☒ Make sure that the supply voltage corresponds to the rated product voltage.
- ☒ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ☒ If the product is damaged, do not use it.


PACKAGE CONTENTS LUV-B:

Description	Quantity
LUV Wall Sconce	1
Mounting bracket (A)	1
Mounting screw (B)	2
Wire nut (C)	3
Fixture screw (D)	2
Box	1



INSTALLATION STEPS LUV-B:

1. Pull the supply wires and the house ground wire out from the outlet box. Attach the mounting bracket to the outlet box using two mounting screws. Ensure the bracket is firmly secured.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connections with wire nuts. Place the wall sconce base over the outlet box. Align the holes of the fixture and the mounting plate before tightening the screws to ensure a solid fit.
3. Rotate the fixture to the desired position. Choose preferred color temperature by adjusting the switch position.

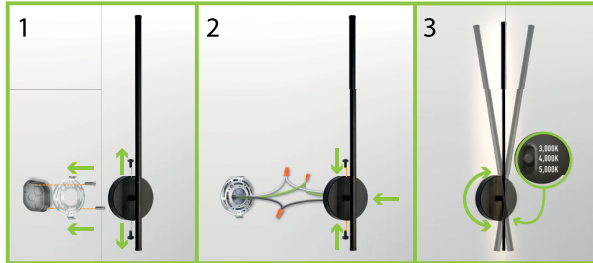

⚠ WARNING

Risk of personal injury: Read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.


PACKAGE CONTENTS LUV-C:

Description	Quantity
Fixture base (A)	1
Light tube (B)	2
Mounting bracket (C)	1
Mounting screw (D)	2
Wire nut (E)	3
Fixture screw (F)	2
Box	1

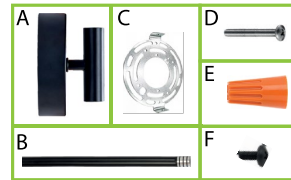

INSTALLATION STEPS LUV-C:

1. Insert the tubes into the fixture base until fully seated. Pull the supply wires and the house ground wire out from the outlet box. Attach the mounting bracket to the outlet box using two mounting screws. Ensure the bracket is firmly secured.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connections with wire nuts. Place the wall sconce base over the outlet box. Align the holes of the fixture and the mounting plate before tightening the screws to ensure a solid fit.
3. Rotate the fixture and the tubes to the desired position. Choose preferred color temperature by adjusting the switch position.

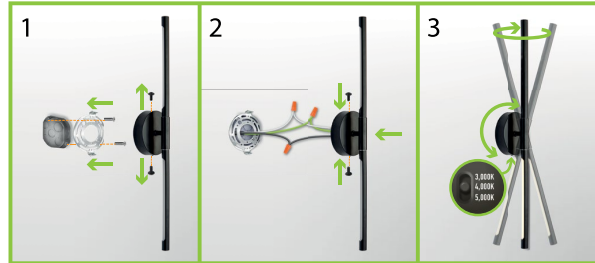

Note: The tubes can only be removed or rotated when the wall sconce is turned off. Attempting to adjust them while the light is on may damage the fixture.