

Description

DESIGN - The ATTIC NOVA feature a stylish geometric open-cage design with clean metal lines and a matte black finish. Its high-quality metal frame adds a bold architectural accent and integrates seamlessly into contemporary home interiors. A reliable lampholder ensures a secure bulb connection and prevents oxidation, while durable copper wiring guarantees stable performance and safety.

VARIETY - The series includes three fixture types - ceiling light, chandelier and pendant, allowing selection based on room size, lighting needs, and interior

BULBS - The fixture includes a standard E26 medium base, compatible with LED bulbs. Bulbs are not included.

APPLICATION - The fixture is designed for kitchens, dining areas, living rooms, bedrooms, hallways, and entryways. The open metal cages provide bright, unobstructed illumination and complement modern and loft-style interiors.

ADVANTAGES - Provides a 3-year limited warranty along with ETL certification to guarantee top quality products and safety!



5 LIMITED 5 YEAR WARRANTY

Finish: Nickel Black

Dimensions (LxWxH)


Mini Pendant

4-3/4" x 4-3/4" x 51-3/16"

CHANDELIER



CEILING LIGHT

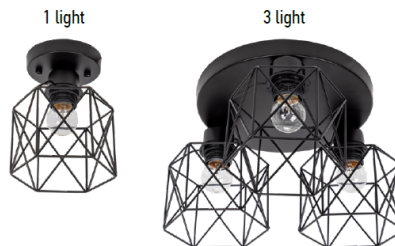

PENDANT



Ordering Info:

CHANDELIER ATTIC NOVA


Model	Number of lights	Bulb	Voltage	Finish
EL-ATTIC NOVA-CN	3 light 5 light	E26	120V	Black

CEILING LIGHT ATTIC NOVA

Model	Number of lights	Bulb	Voltage	Finish
EL-ATTIC NOVA-CN	1 light 3 light	E26	120V	Black


PENDANT ATTIC NOVA

Model	Number of lights	Bulb	Voltage	Finish
EL-ATTIC NOVA-CN	1 light 3 light	E26	120V	Black

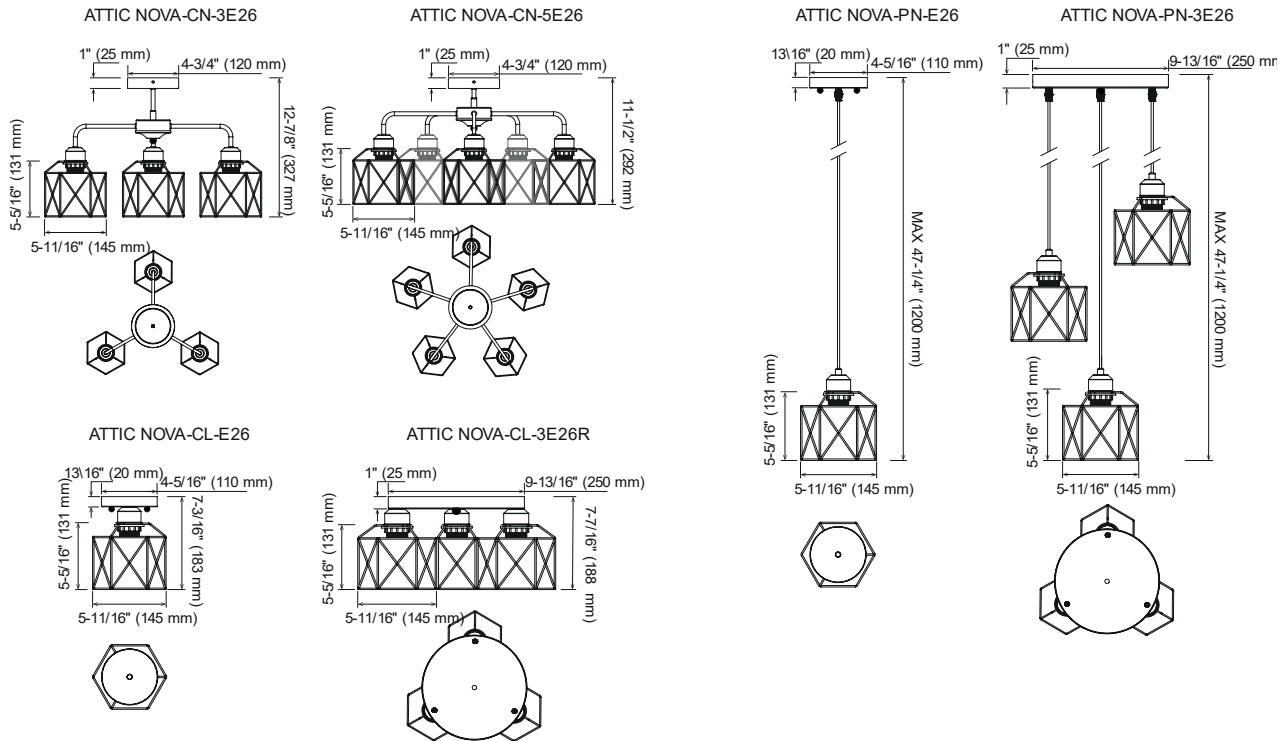


PACKAGE CONTENTS FOR PENDANT 1 LIGHT:

Description	Quantity
Mounting plate (A)	1
Mounting screw (B)	2
Wire nut (C)	3
Fixture screw (D)	2
Hex nut (E)	4
Ceiling base (F)	1
Decorative cap (G)	2
Lampshade (H)	1
Lampholder ring (I)	1
Box	1

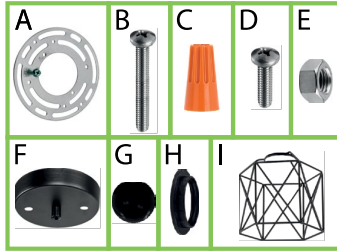

PACKAGE CONTENTS FOR PENDANT 3 LIGHT:

Description	Quantity
Mounting plate (A)	1
Mounting screw (B)	2
Wire nut (C)	3
Hex nut (D)	1
Threaded sleeve (E)	1
Ceiling base (F)	1
Decorative cap (G)	1
Lampholder ring (H)	3
Lampshade (I)	3
Box	1

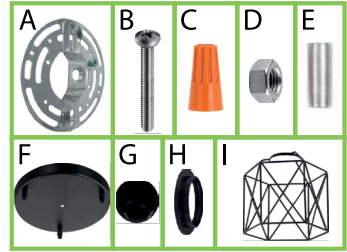

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ✗ Make sure that the supply voltage corresponds to the rated product voltage.
- ✗ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ✗ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: Read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.


INSTALLATION STEPS FOR CHANDELIER:

1. Insert each arm into the side holes of the fixture body, slide a screw washer onto each arm, and secure with hex nuts. Route the wires through the center tube, thread on the slotted coupling nut, insert the tube in to the fixture body, tighten, then attach the lampshades and secure them with lampholder rings.
2. Connect the fixture wires together: Black to Black, White to White, Ground to Ground, and secure with wire nuts. Install the decorative cover onto the fixture body, fix it with the decorative cap, and attach the tube to the ceiling base using the screw washer and hex nut.
3. Attach the mounting plate to the outlet box with the mounting screws. Connect the supply wires: Black to Black, White to White, Ground to Ground, secure with wire nuts. Align the fixture holes with the mounting plate, secure the fixture with screws, and screw in the bulbs (bulbs are not included).

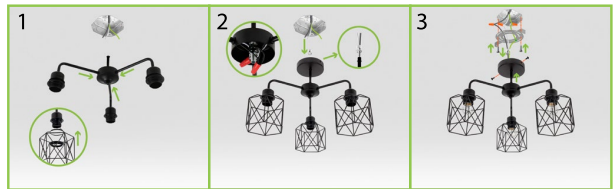

INSTALLATION STEPS FOR CEILING LIGHT:

1. Insert the screws through the mounting plate and secure each with a hex nut, leaving a few millimeters of space on the screws. Attach the lampshades and secure it with lampholder rings.
2. Attach the mounting plate to the outlet box using the mounting screws. Connect the wires: Black to Black, White to White, Ground to Ground. Secure all connections with wire nuts and carefully tuck the wires back into the outlet box.
3. Align the fixture holes with the screws on the mounting plate, make sure the fixture fits securely, and fasten it using the decorative caps. Screw in the bulbs (bulbs are not included).

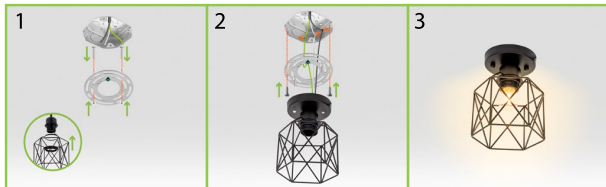

INSTALLATION STEPS FOR PENDANT LIGHT:

1. Insert the screws in to the hex nuts, then pass them through the mounting plate and thread the second set of hex nuts onto the screws. Make sure to leave a few millimeters of space on the screws.
2. Adjust the cords to the desired length and tighten in place. Attach the mounting plate to the outlet box using the mounting screws. Connect the wires: Black to Black, White to White, Ground to Ground. Secure all connections with wire nuts and carefully tuck the wires back in to the outlet box.
3. Align the fixture with the screws on the mounting plate, make sure the fixture fits securely, and tighten it using the decorative caps. Attach the lampshades, secure with lampholder rings, and screw in the bulbs (bulbs are not included).

